

Hand control for controller Compact and motor cables



Ketterer's range of accessories offers a large selection of hand switches in various designs, with or without display, with simple or touch buttons and various motor cables to suit the respective Ketterer drives.

Special features

- Stepless adjustment
- User-defined and application-oriented control of your stepless adjustment
- Can be used with the Compact controller and all Ketterer motor drives

Technical data

Motor cable	For use with drives
4138.53-01/ Length 1 m 4138.53-02/ Length 2 m	4630, 4773
3122.53-02/ Length 1,75 m	4643, 3120, 3121, 3122, 3133.48

Hand switch	Description
3143.47-50/ HSU-C-FL-SM-LD	Switch with display and four memory positions, stroke heights and two up-down buttons, free programmable
3143.47-48/ TOUCH-FX-MDF-KM-LD	Switch with display and four memory positions, with touch & click function
3143.47-30/ HSM-OD-2-LD	Simple hand control, up-down
3143.47-42/ TOUCH-Basic-UD-2-LD	Simple hand control up-down, with touch function
3143.47-0003/ Receiver, remote control	RF remote control consisting of RF receiver, remote control (including battery and mounting screws), and manual


* Further details under <http://www.logicdata.at>

Motor cable 4138.53-01: 1 m long
4138.53-02: 2 m long

AMP - Serie HE 14 plug allocation

A			B			
1	3	5	7	4	5	6
2	4	6	8	2	3	7
				1		8

Pin-No.	signal	colour	Pin-No.	signal	colour
6,8	motor blue	black, blue	4	motor blue	black, blue
5,7	motor red	brown, orange	8	motor red	brown, orange
2	+5VDC, reverb	red	2	+5VDC, reverb	red
4	GND, reverb	grey	3,7	reverb-signal 2	grey
3	reverb-signal 2	green	5	GND, reverb	green
1	reverb-signal 1	violet	1	reverb-signal 1	violet

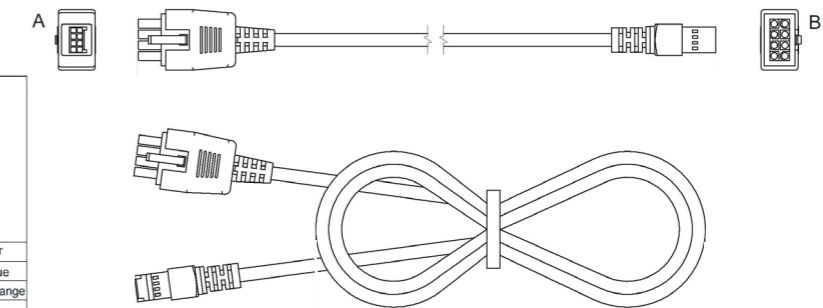


Motor cable 3122.53-02: 1.75 m long

AMP - 172160 plug allocation

A			B		
1	4	5	4	5	6
2	3	6	3	6	7
3	6		2	7	8
			1	8	

Pin-No.	signal	colour	Pin-No.	signal	colour
1	motor blue	black, blue	4	motor blue	black, blue
2	motor red	brown, orange	8	motor red	brown, orange
3	+5VDC, reverb	red	2	+5VDC, reverb	red
4	reverb-signal 2	green	5	reverb-signal 2	green
5	GND, reverb	gray	3,7	GND, reverb	gray
6	reverb-signal 1	violet	1	reverb-signal 1	violet

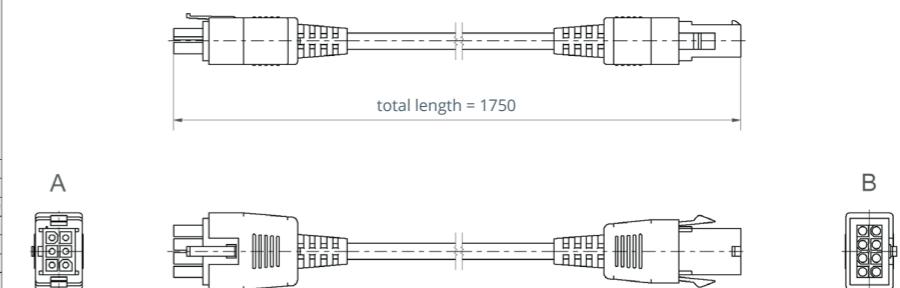

Technical notes

- Hand switches with touch function require the Compact controller with firmware Version 1.9
- For stroke programming or changing the travel on site a hand switch with display is always required